


Sound Absorption Prediction

NRC 0.70

8.4% Open Area

| Frequency | Alpha |
|-----------|-------|
| 50 | 0.07 |
| 63 | 0.11 |
| 80 | 0.19 |
| 100 | 0.29 |
| 125 | 0.43 |
| 160 | 0.64 |
| 200 | 0.90 |
| 250 | 1.07 |
| 315 | 1.14 |
| 400 | 1.22 |
| 500 | 1.08 |
| 630 | 0.88 |
| 800 | 0.65 |
| 1000 | 0.45 |
| 1250 | 0.32 |
| 1600 | 0.22 |
| 2000 | 0.17 |
| 2500 | 0.17 |
| 3150 | 0.18 |
| 4000 | 0.10 |
| 5000 | 0.09 |

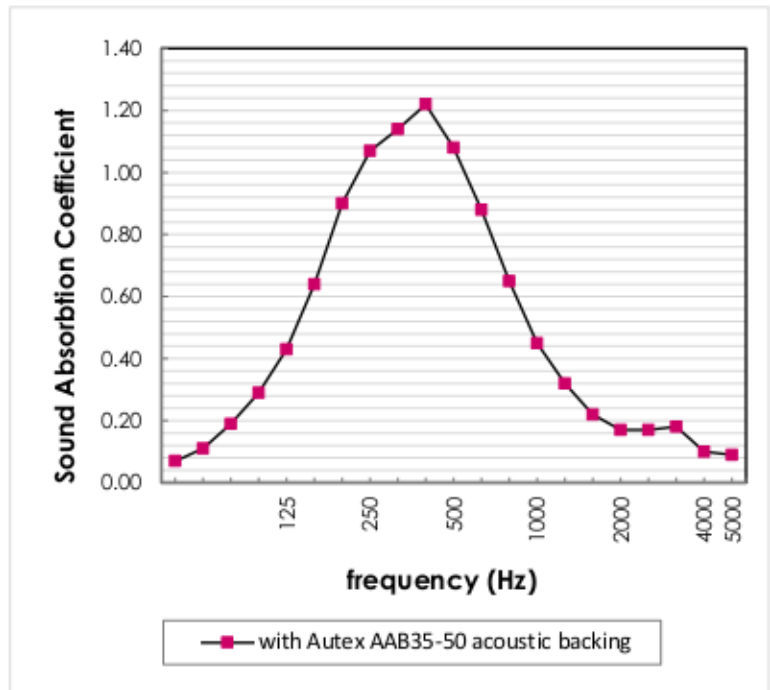

Sound absorption coefficients according to ISO354. Based on 15mm panel thickness.

Margin of error is generally within +/- 0.05

Prediction by Marshall Day Acoustics based on tests by University of Auckland Acoustic Testing Service
For a Sound Absorption Prediction on your design call the team at Décortech

Décortech Ltd 117 Hugo Johnston Drive, Penrose, Auckland

PO Box 17091, Greenlane, Auckland 1006, New Zealand

Phone: +64 9 579 5726 Fax: +64 9 579 0462 Freephone: 0800 211 311 Email: info@decortech.co.nz

This Datasheet and all information within it remains the property and copyright of Décortech Ltd